


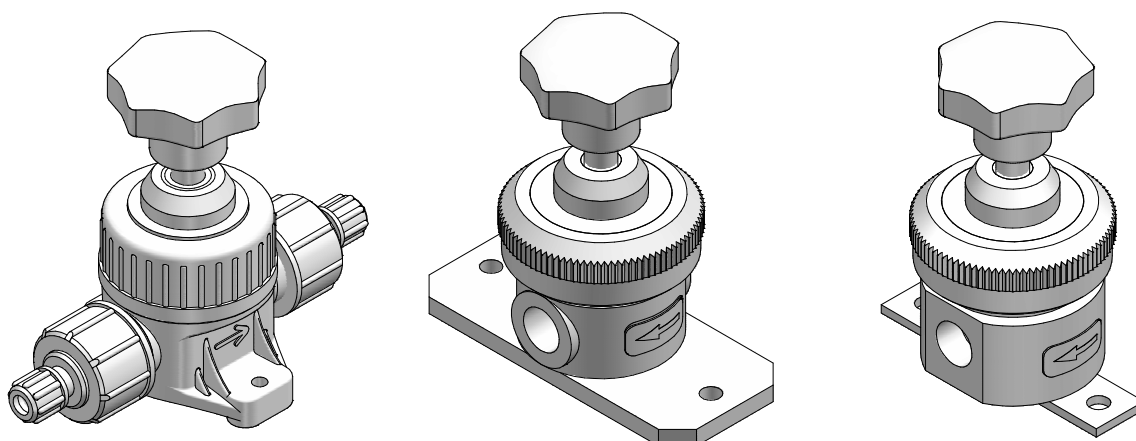

1) General

With the handwheel of the valve you can shut off pipes and hoses.

2) Technical data

Value	Nominal width		
	DN6	DN10	DN15
Nominal flow	75 l/h	200 l/h	500 l/h
Nominal pressure	PN16	PN10	PN10
Casing material	PVC, PP-GF, PVDF, 1.4571		
Material diaphragm	EPDM-PTFE coated / FPM / EPDM		
Material seal	EPDM / FPM		
Max. operating temperature	35 °C (PVC) - 50 °C (PP, PVDF)		

Table 1: Technical data

3) Dimensions

DN/Material		A	B	C	D	E	F	H	L
DN6	Plastic	-	-						~140
	Stainless steel*	-	-	21.5	5	60	71	90	~90
	Stainless steel	G1/4	12						41
DN10	Plastic		12			92	112	90	50
	Stainless steel	G3/8	10	18.5	7	72	90	94	49
DN15	Plastic		16	21				92	70
	Stainless steel	G1/2	20	21.5	7	92	112	96	67

Table 2: Dimensions

* with hose clamp connection in PVDF

